


8AGC2

SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	220 Ah
Capacity at C/20	190 Ah
Capacity at C/5	163 Ah
Weight	68 lbs. (31 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle Float	6.9 - 7.3 volts 6.7 - 6.8 volts
Vent	Self-sealing
Terminal	U (SAE/STUD)



Rated UN2794—Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology



DIMENSIONS


Inches (mm)

Length (mm) 10.25 (260 mm)

Width (mm) 7.09 (180 mm)

Height (mm) 10.88 (276 mm)
including terminal

AGM Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

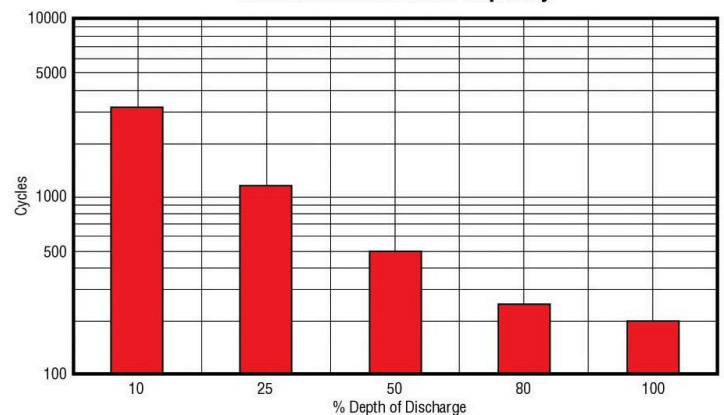

Cycle Chart applies to all MK AGM batteries (except 8AGC2-DEKA cycle chart x 2)

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

