


# 8GGC2

## SPECIFICATIONS

|                              |                               |
|------------------------------|-------------------------------|
| Nominal Voltage (V)          | 6V                            |
| Capacity at C/100            | 198 Ah                        |
| Capacity at C/20             | 180 Ah                        |
| Capacity at C/5              | 147 Ah                        |
| Weight                       | 69 lbs. (31 kg)               |
| Plate Alloy                  | Lead Calcium                  |
| Posts                        | Forged Terminals & Bushings   |
| Container/Cover              | Polypropylene                 |
| Operating Temperature Range  | -76°F (-60°C) - 140°F (60°C)  |
| Charge Voltage @ 77°F (25°C) |                               |
| Cycle                        | 6.9 - 7.3 volts               |
| Float                        | 6.7 - 6.8 volts               |
| Vent                         | Self-sealing                  |
| Electrolyte                  | Sulfuric acid thixotropic gel |
| Terminal                     | U (SAE/STUD)                  |



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

## Valve-Regulated, Gelled-Electrolyte Battery




## DIMENSIONS

Inches (mm)

|        |                                      |
|--------|--------------------------------------|
| Length | 10.25 (260 mm)                       |
| Width  | 7.09 (180 mm)                        |
| Height | 10.88 (276 mm)<br>Including terminal |

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

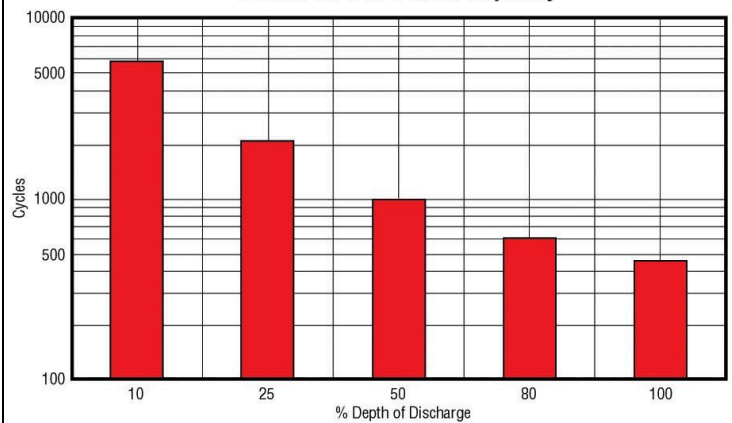

Cycle Chart applies to all MK Gel batteries (except 8GGC2-DEKA cycle chart x 2 and 8G31DT-DEKA cycle chart x .67).

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

